



LIGHT COLUMN ROUND




DIMENSIONS

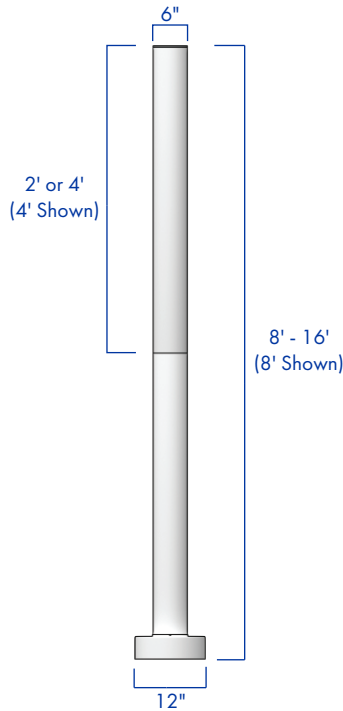

ANCHORAGE



Anchor Bolt
Bolt Projection
3.25" - 3.75"



Anchor Plate
12" Diameter
9" B.C.D.

DESCRIPTION

The Light Column sets the standard for producing an eye catching and calming visual display in public areas, while taking advantage of an energy saving LED light source. The Light Column is suited for both classic and modern architecture. This bollard creates a stylish effect at night, and possesses attractive decor during the day.

FEATURES

- Round extruded and spun aluminum construction
- Stainless steel hardware
- White acrylic lens mounts to extruded aluminum shaft and cap, fully gasketed using molded high-temperature silicon.
- 0-10V dimmable driver
- 10-20KV surge protection
- IP67 rated modules - 5 year warranty
- Low maintenance cost with lifetime >54,000 hrs
- LED modules arranged in a Type V optic pattern for even light distribution.
- Anchor bolts are fabricated from hot-rolled carbon steel bar with minimum yield strength of 55,000 PSI. Bolts are fully galvanized and conform to ASTM-F1554 A55. Each bolt is furnished with two hex nuts and two flat washers.
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



ORDERING INFORMATION

AVPL -

BOLLARD	LENS	HEIGHT	WATTAGE	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
LC-RD-WA	2' 48W or 72W	8'	48W 350mA	3000K WARM WHITE	120-277V VOLTAGE SENSING	DARK BRONZE	HOUSE-SIDE SHIELD
	4' 96W or 144W	10'	72W 525mA	4000K NEUTRAL WHITE	347-480V VOLTAGE SENSING	BLACK	PHOTOCELL BUTTON
		12'	96W 350mA	5000K COOL WHITE		WHITE	ALUMINUM DECORATIVE BODY
		14'	144W 525mA			GREY	RGB LIGHTING
		16'				GREEN	
			96W and 144W MUST USE 4' LENS		ALL RAL COLORS AVAILABLE		

LUMEN OUTPUT CHART

3K		48W	72W	96W	144W	4K		48W	72W	96W	144W	5K		48W	72W	96W	144W
	Type V	8,496	11,952	16,992	23,904		Type V	8,800	12,528	17,760	25,056		Type V	8,976	12,672	17,952	25,344