


BOARDWALK BOLLARD



DIMENSIONS

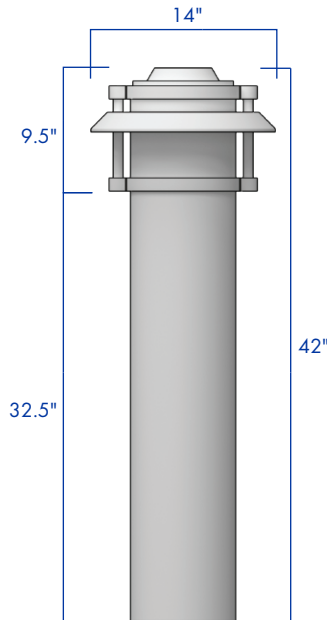

ANCHORAGE



DESCRIPTION

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The BW-BOL series by AV Poles and Lighting is ideal for courtyards, pathways, and all low level lighting applications.




FEATURES

- Round extruded, spun, and cast aluminum construction
- Stainless steel hardware
- Acrylic injection molded lenses with smooth clear or opal finish.
- 0-10V dimmable driver
- 10-20KV surge protection
- IP67 rated modules - 5 year warranty
- Up to 180 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- LED modules arranged in a Type V optic pattern for even light distribution.
- Anchor bolts are fabricated from hot-rolled carbon steel bar with minimum yield strength of 55,000 PSI. Bolts are fully galvanized and conform to ASTM-F1554 A55. Each bolt is furnished with two hex nuts and two flat washers.
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



ORDERING INFORMATION

AVPL -

BOLLARD	HEIGHT	WATTAGE	COLOR TEMP	VOLTAGE	OPTICS	FINISH	OPTIONS
BW-BOL	36"	18W 350mA	3000K WARM WHITE	120-277V VOLTAGE SENSING		DARK BRONZE	STANCHION MOUNT
	42"	26W 525mA	4000K NEUTRAL WHITE	347-480V VOLTAGE SENSING		BLACK	HOUSE-SIDE SHIELD
		36W 700mA	5000K COOL WHITE			WHITE	PHOTOCELL BUTTON
		52W 1050mA				GREY	
						GREEN	
*APPLY ILL OF 10% TO LUMEN OUTPUT CHART						ALL RAL COLORS AVAILABLE	

LUMEN OUTPUT CHART

3K		18W 350mA	26W 525mA	36W 700mA	52W 1050mA	4K		18W 350mA	26W 525mA	36W 700mA	52W 1050mA	5K		18W 350mA	26W 525mA	36W 700mA	52W 1050mA
	Type V	2,462	3,349	4,348	5,865		Type V	2,592	3,515	4,579	6,156		Type V	2,617	3,550	4,624	6,217