

Job Name: _____ Location: _____ Quote: _____
 Client Name: _____ Type: _____ Quote Date: _____

DESCRIPTION

This versatile arm is suited for traditional and contemporary fixtures. The SHA2 arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

Pendant Mount standard fixture mounting.


Mounts to 3" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.

6061 alloy T-6 temper with cast aluminum slip-fitter.

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

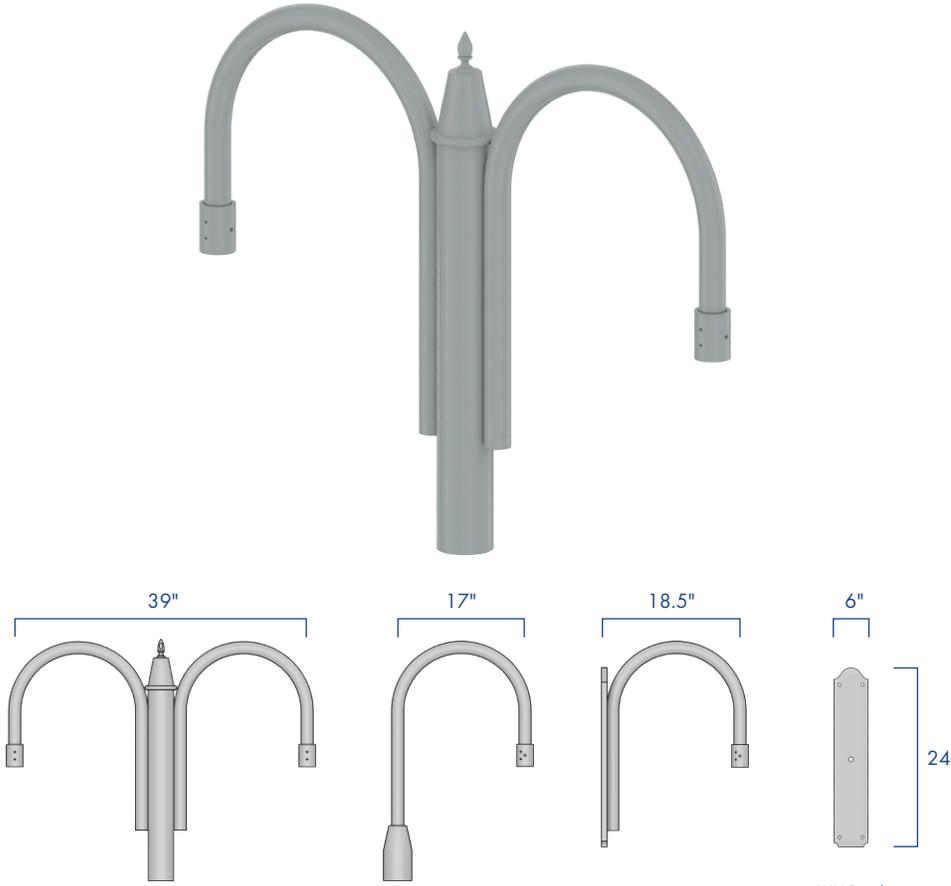

ORDERING INFORMATION

AVPL -

ARM	MOUNTING	FINISH
SHA2	1-90..... ○	DARK BRONZE
	2-90..... ○○	BLACK
	2-180..... ○○	WHITE
	3-90..... ○○○	GREY
	3-120..... ○○○	GREEN
	4-90..... ○○○○	
	WALL MOUNT..... ○	

CONTACT
 FACTORY FOR
 DRILLING OPTIONS

ALL RAL COLORS
 AVAILABLE